



**ANALYSIS OF STABILITY OF RAIN-INDUCED
SHALLOW LANDSLIDES IN RESIDUAL FORMATIONS
IN SRI LANKA**

Thesis submitted to

The Open University of Sri Lanka

for the award of degree of

Master of Philosophy


February, 2021



Supun Chathuranga Walpita

M.Phil/ENG/2018

74750

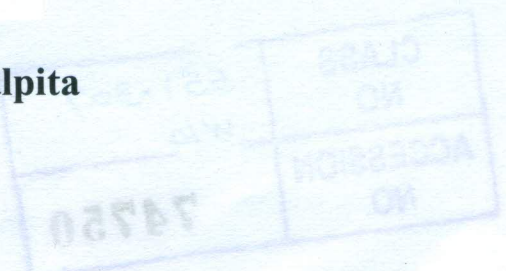

ABSTRACT

Landslides in the residual hill slopes in tropical countries such as Sri Lanka are initiated mainly by rainfall and are often categorized as shallow planar failures. Residual soil in tropics exhibit distinct soil layering due to varying degrees of weathering, more or less parallel to the ground surface. These layered formations may exhibit contrast in hydraulic and shear strength properties with depth, and this determines the stability of such slopes. The main objective of this study was to model a two layered soil formation subjected to a one dimensional water infiltration during a rainfall event, and to investigate the effect of changing permeability characteristics, and the layer thickness of the two layers, on failure depth, elapsed time and the mechanism causing a shallow landslide.

Two soil types, relatively coarse-grained and fine grained were assumed in the layered soil model. The permeability and the shear strength parameters typical for local residual soil types were assumed. The analysis considered two soil layers overlying one another, with varying infiltration conditions. In partially saturated soils, infiltration has been modelled as a 1-D phenomenon. In this regard, researchers have developed finite difference method based numerical schemes to represent the mixed form of Richard's equation. A MATLAB code representing the mixed form of Richard's equation (1931) was modified and used to address the objectives of this study. As the outcome of this analysis, the variation of pressure head profile across the depth of the two layers were modelled with elapsed time.

The stability analysis has been conducted for varying rainfall intensities and permeability characteristics using a pre-defined stability envelope according to the method proposed by Collins and Znidarcic (2004). This stability envelope was developed using the assumed shear strength parameters of the two soil types and it indicates the critical depth of failure as a function of pressure

head. The failure of the slope can be determined when the pressure head profile intersects the stability envelope. This also defines the failure depth and the time to failure. The hazard of the slope failure increases as the failure time decreases as it gives less time to respond. Also when the failure depth increases, it increases the possibility of moving a larger soil mass, thus increasing the hazard. Failure occurring at a positive pore water pressure or a negative pressure indicates whether the triggering mechanism is due to a loss of suction or a development in a positive pore water pressure situation.

For the case where a fine-grained soil overlies a coarse-grained soil, results showed that the failure depth increases significantly when the saturated permeability of the coarse-grained soil increases relative to the fine soil. It further increases the susceptibility of moving a larger soil mass during a landslide event and the only possible failure mechanism identified was due to the loss of suction. When a coarse-grained soil overlies a fine-grained soil, no significant effect on failure depth was observed; loss of suction and the development of a perched water table were identified as possible mechanisms. For both cases, it was noticed that the failure time decreases as the saturated permeability of coarse-grained soil increases, which confirms its increased susceptibility to failure during a short rainfall event. These results suggest that a contrast in permeability characteristics in layered soil formations plays a vital role in influencing failure time, depth and the triggering mechanism.

For the scenario where a fine soil overlies a coarse-grained soil, and when the thickness of the fine-grained layer increased, the failure time tend to decrease and the failure depth tend to increase, leading to increased risk to life and property. When the coarse-grained soil overlies fine-grained soil, the failure time tends to increase with the thickness of the coarse layer. No significant

correlation was observed with failure depth. It is also observed that the change in thickness of the layers does not change the failure mechanism, as determined for a given layer arrangement.

This study shows that the critical combination of factors: relative permeability, rainfall intensity and arrangement of the fine-grained and coarse-grained soil in the two layered system decided the hazard risk.